









Impedance variation: Extensive lineup are available for compatibility with various usages
 Common mode filter or Signal Line
 Operating temperature range: -40 to +125
 AEC-Q200 qualified
 Quantity: 500pcs

Radiated noise suppression for car multimedia
 (MO)




Part No	Z @ 100 MHz Min.	Z @ 100 MHz Typ.	I _R Max.	R _{DC} Max.	V _{DC} Max. (V)	IR Min.
BCMA4532-900N				0.050	50	10M
BCMA4532-231N			3500	0.050	50	10M
BCMA4532-601N	450		2500		50	10M
BCMA4532-901N	650				50	10M
BCMA4532-142N					50	10M
BCMA4532-282N				0.350	50	10M




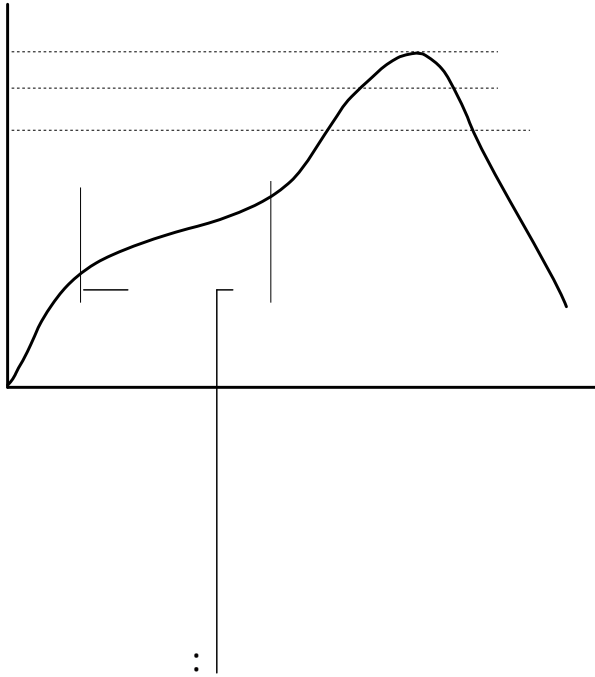

45? 3& %\\$	%\f "ž#	&ž+f "ž#	#ž f "ž#	&ž' f "ž#	*ž' f "ž#	#\$ž' f "ž%	%ž' f "ž#	#ž)' f "ž#	"ž\$(f "ž'

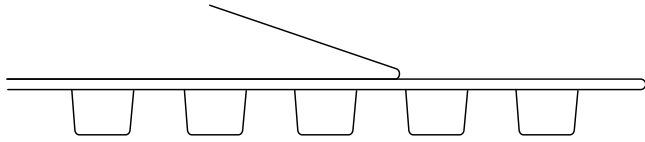

:

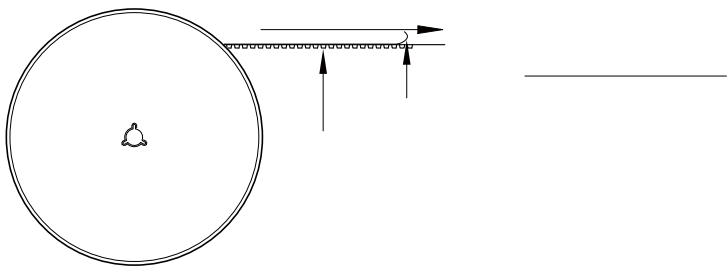

:

•

•

•

•

•

•

•

•