


- Noise reduction solution for general signal line.
- Various frequency characteristics with 2 materials of different features for countermeasures against everything from general signals to high-speed signals
- AEC-Q200 qualified
- Operating temperature: -55° to +150°C
- Quantity: 3000pcs

- Signal line filter for body controls, and car multimedia etc.

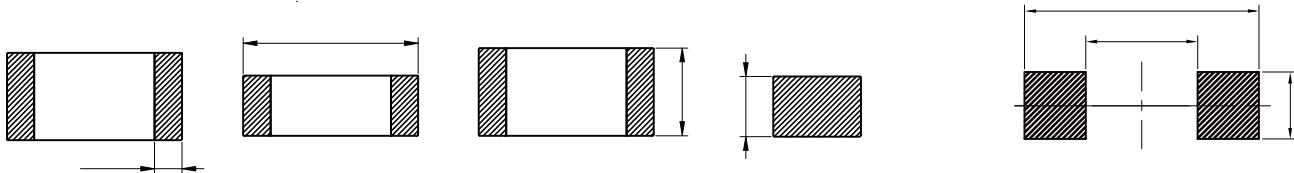

Part No	Z @ 100 MHz	Tolerance	R _{DC}	I _R
FBA1206-260-501R		±25%	0.20	500
FBA1206-310-501R		±25%	0.20	500
FBA1206-420-501R		±25%	0.20	500
FBA1206-500-501R		±25%	0.20	500
FBA1206-700-501R		±25%	0.20	500
FBA1206-900-501R		±25%	0.20	500
FBA1206-121-901R		±25%	0.15	900
FBA1206-151-901R		±25%	0.15	900
FBA1206-221-701R		±25%	0.35	700
FBA1206-301-701R		±25%	0.35	700
FBA1206-471	® TM	±25%	0.35	400
30		±25%	0.40	400

I_R referring to 20K self-heating above ambient temperature
 4
 50
 70

