

FHC Series

SMD Flat Wire High Current Inductor

Size 1365




CHARACTERISTICS

- Low Rdc with flat wire design
- Low copper losses at high frequency
- Magnetic shielded structure
- Quantity: 400pcs


APPLICATION

- High current DC/DC converter
- LC filter

Dimensions: [mm]



Land Pattern: [mm]






Electrical Properties:

(μH)		Saturation			
		(A)	(A)	(mΩ)	(mΩ)
±20%	32.0	65.0	0.35	0.40	
±20%	30.0	50.0	0.67	0.85	
±20%		35.0	0.90	1.10	
±20%		25.0	1.80	2.00	
±20%		22.0	2.60	2.90	
±20%		17.5	3.30	3.60	
±20%		16.0	4.90	5.40	
±20%		15.0	7.00	7.70	
±20%		14.0	8.40	9.20	
±20%		12.0	5.90	6.50	
±20%		10.5	7.80	8.60	
±20%		9.50	9.10	10.0	
±20%		9.00	11.2	12.3	

Test Frequency : Inductance : 100KHz /0.1V.
 Operating Temperature : -40 °C to +125 °C
 Temperature Rise Current: the actual value of DC current when the temperature rise is $\Delta T 50^{\circ}\text{C}$
 Saturation Current that will cause initial inductance to drop approximately 30%

Typical Electrical Characteristics:

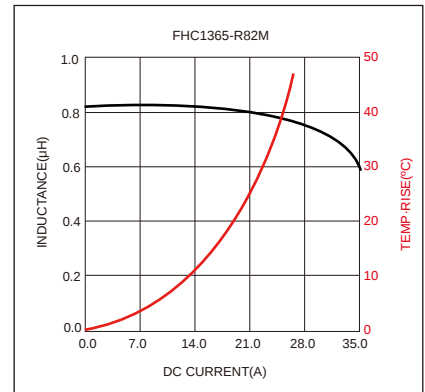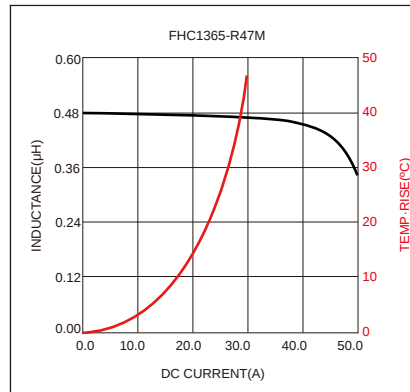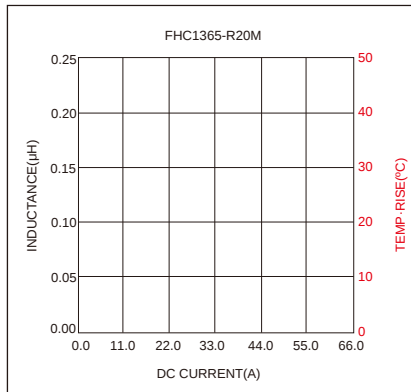

Typical Electrical Characteristics:

