








Part No	Inductance @ 100KHz/1V	Tolerance	Temperature Rise Current Typ. (A)	t t Current Typ. (A)	DC Resistance Typ.	DC Resistance Max.

### Typical Electrical Characteristics:

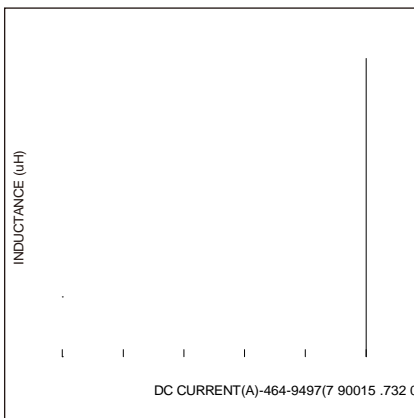

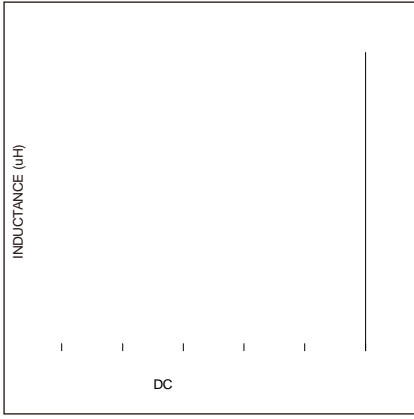

## Soldering Reflow:

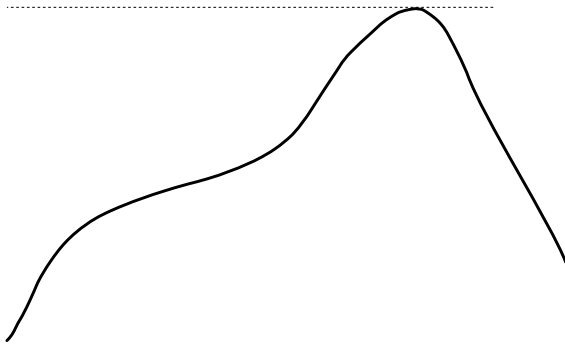

Preheat condition: 150 ~200°C / 60~120 sec.

Allowed time above 217°C : 60~90 sec.


Max temperature: 260°C .

Allowed Reflow time: 2x max.

## Packaging Information:

Tape Dimension :

Peel force of top cover tape:

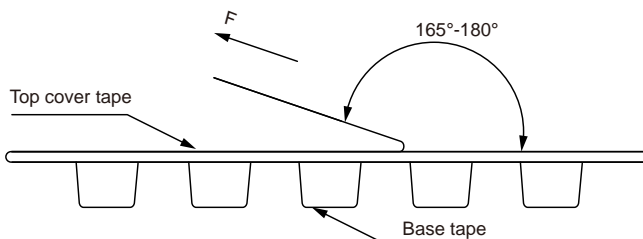


The peel force of top cover tape shall be between 0.1 to 1.3 N

Product Marking:


Marking	K+Printing (Inductance+period)
---------	--------------------------------



## Reel Dimension: [mm]

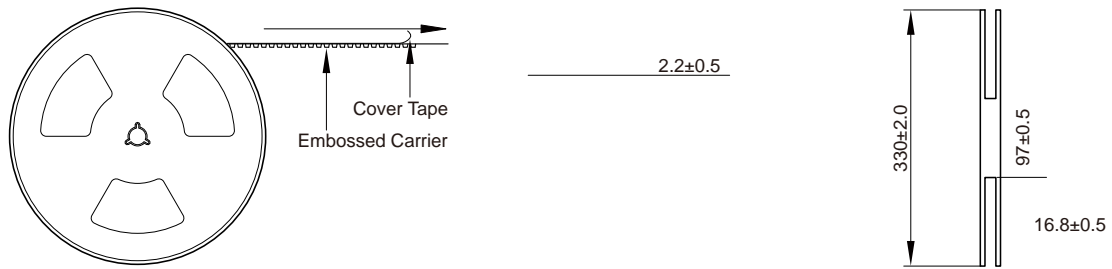


## Packaging Quantity:



800 Pcs/Reel



2 Reel /Inner box( 1600 Pcs)



3 Inner box/Carton box(4.8K Pcs)

## Cautions and Warnings:

Storage Conditions:

Operation Instructions: