



WI Series
Wire Wound Inductor
Size 1608


FEATURES

- Ferrite core wire wound construction
 - High Reliability due to wire wound type construction
 - Small footprint as well as low profile
 - Application for DC power line
 - Operating temperature-40~+125 °C
-
- Quantity: 3000 pcs

APPLICATION

-
-

Dimensions: [mm]

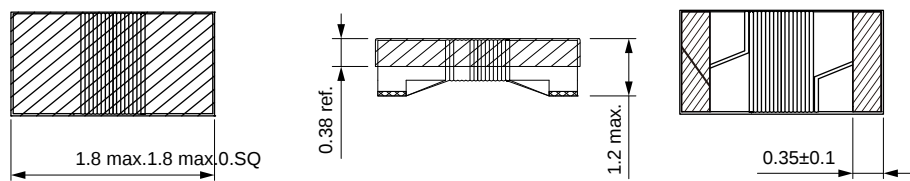

Electrical Properties:

Part No	Inductance	Tolerance	Test Frequency	Q Min.	Test Frequency	Temperature Rise Current Max.	DC Resistance Max.	SRF Min.

